


Lupo
Made in Italy

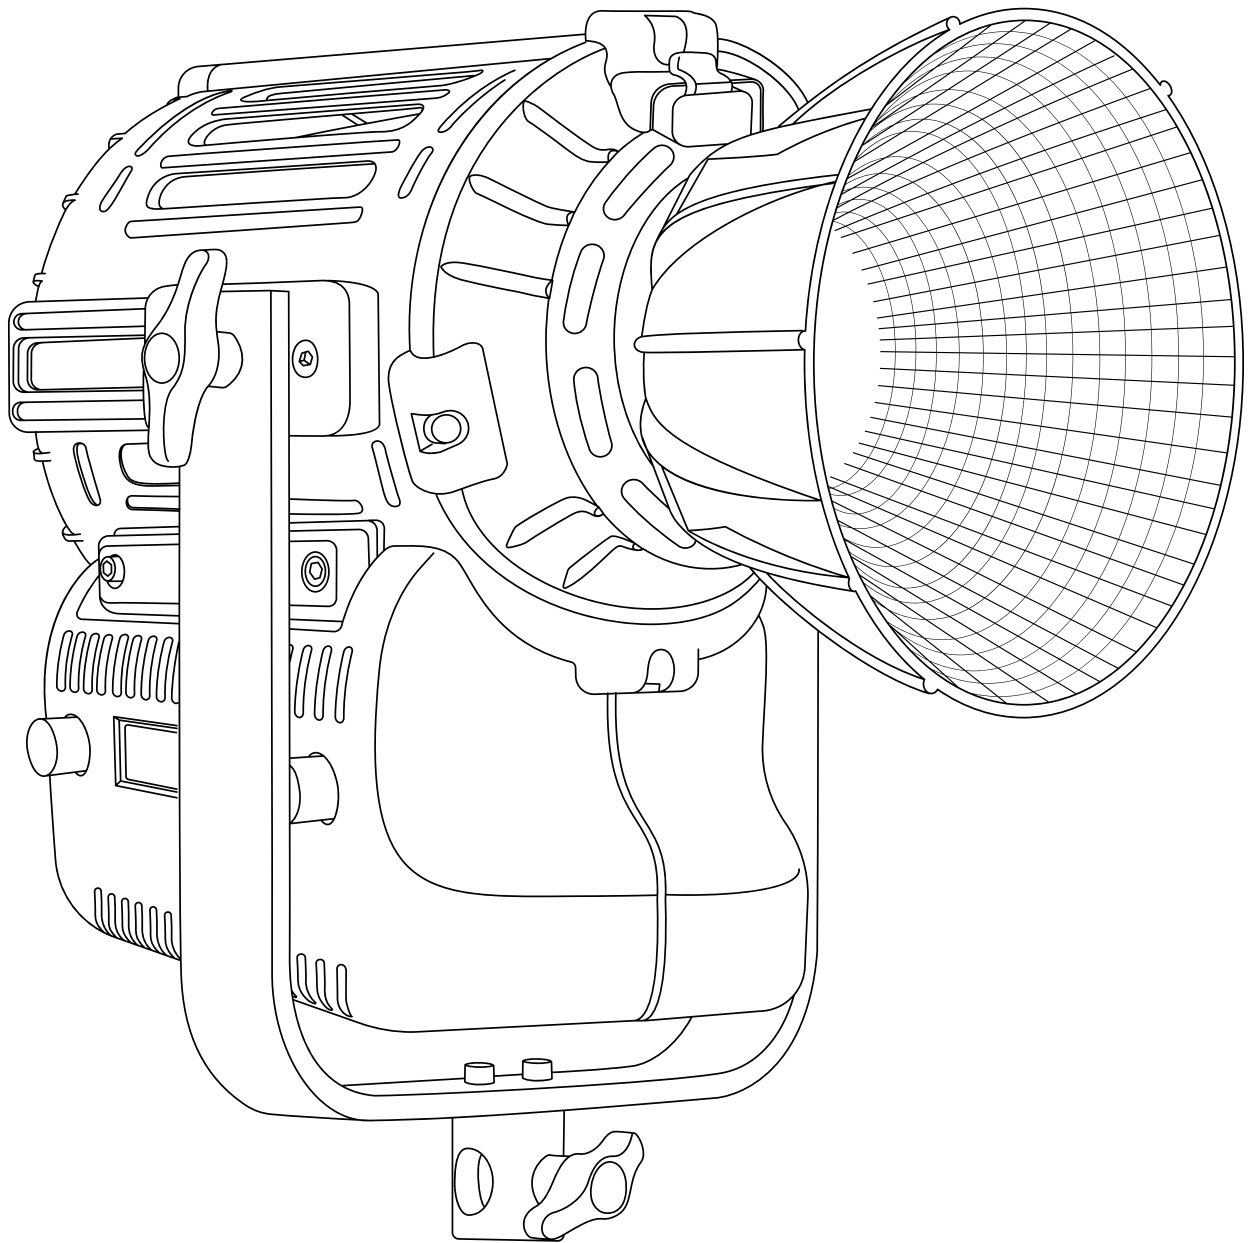

Cod 906 PRO





MovielightPRO Dual Color 600

Technical Data

Dimensions (cm)	212 x 274 x 352 mm
Dimensions (in)	8.3 x 10.7 x 13.8 in
Weight (kg)	5 kg
Weight (lb)	11 lb
CRI (Colour Rendering Index)	97
TLCI (Television Lighting Consistency Index)	99
Estimated LED lifetime (L80)	50,000 hours
LED COB	500 W
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
Connection for 14.8 V battery with standard XLR 4 pin connector (pin 1: negative / pin 4: positive)	included
Standard XLR 5 pin connectors to DMX console	included
Bluetooth Long Range	included
Accessory type	Bowens Mount
Parabolic Hyper Reflector	included
Watt consumption	360 W
Firmware upgrades	through USB port
Colour temperature	2800 K - 6500 K
Voltage AC	90 V - 240 V
Voltage DC	14.8 V
Light beam	85° (bare bulb) - 55° (with hyper reflector)
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power factor	0.96

Photometric data	6500 K		5600 K		3200 K	
	bare bulb	hyper reflector	bare bulb	hyper reflector	bare bulb	hyper reflector
Distance						
Lux at 1 m - 3.2 ft	23000	55000	22000	53000	18000	42000
Lux at 2 m - 6.5 ft	5500	11800	5150	10500	4100	8500
Lux at 3 m - 9.8 ft	2400	4650	2250	4350	1750	3500
Lux at 4 m - 13.1 ft	1350	2650	1260	2450	990	1900
Lux at 5 m - 16.4 ft	860	1600	820	1550	640	1200

Technical Drawing

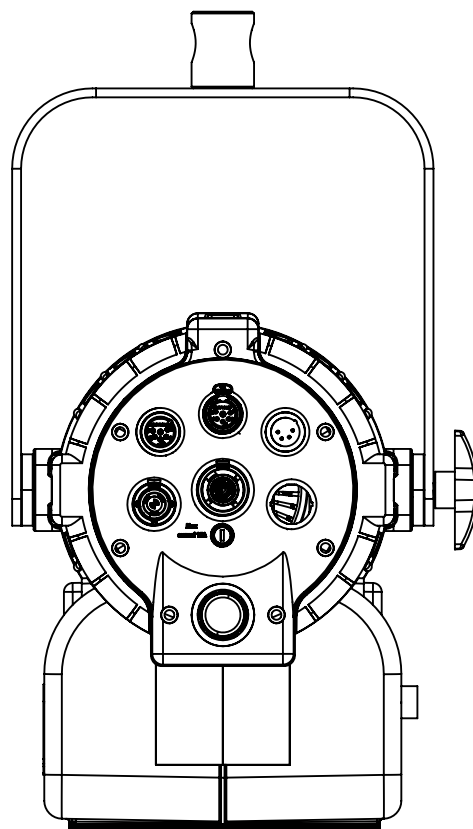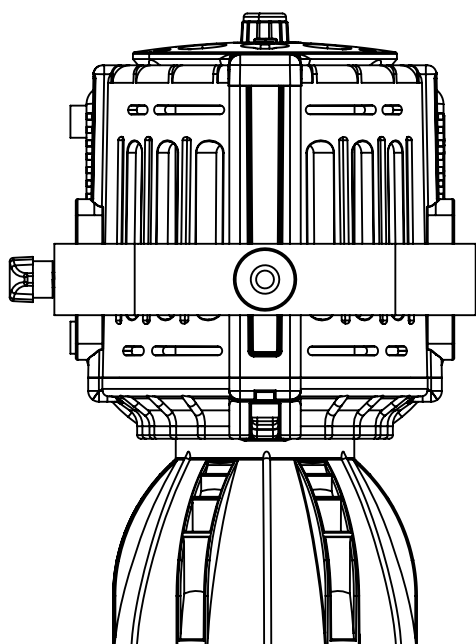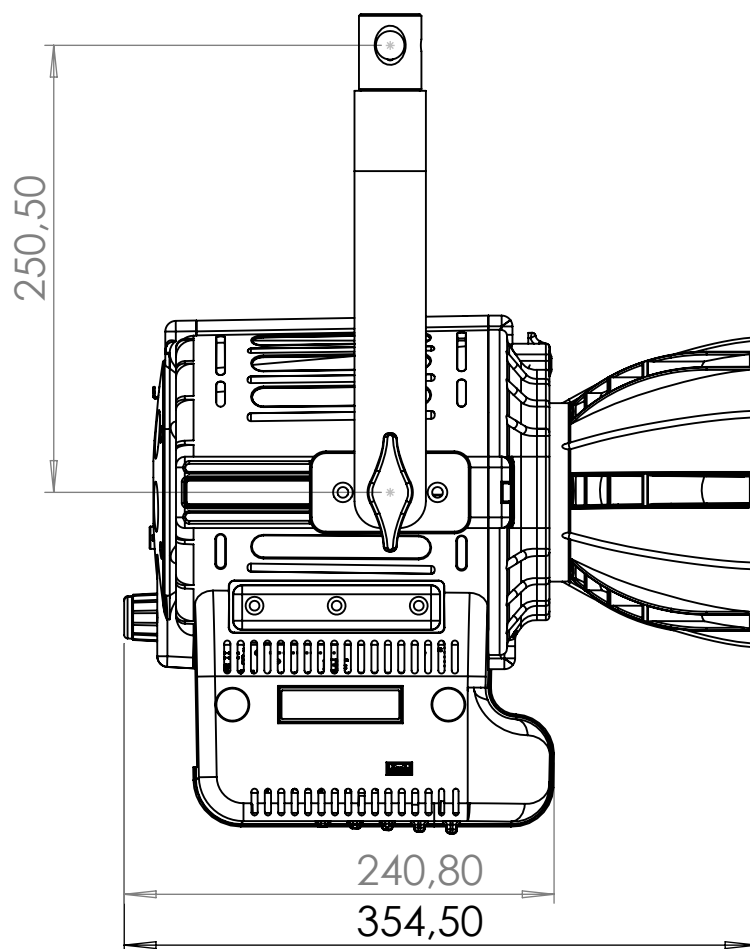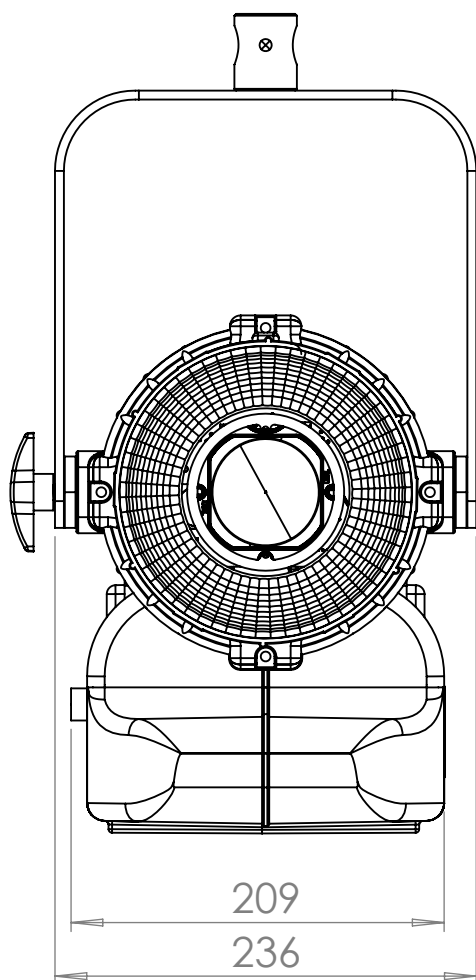

Pole Operated Yoke

