

YoloBox Mini

Exterior




YoloBox Mini NOW AVAILABLE - Ultra-Portable, All-In-One Live Streaming Encoder & Monitor. CcX

Dimensions & Weight



Height: 20 mm
Width: 92.6 mm
Length: 155 mm
Weight: 320 g

Ports

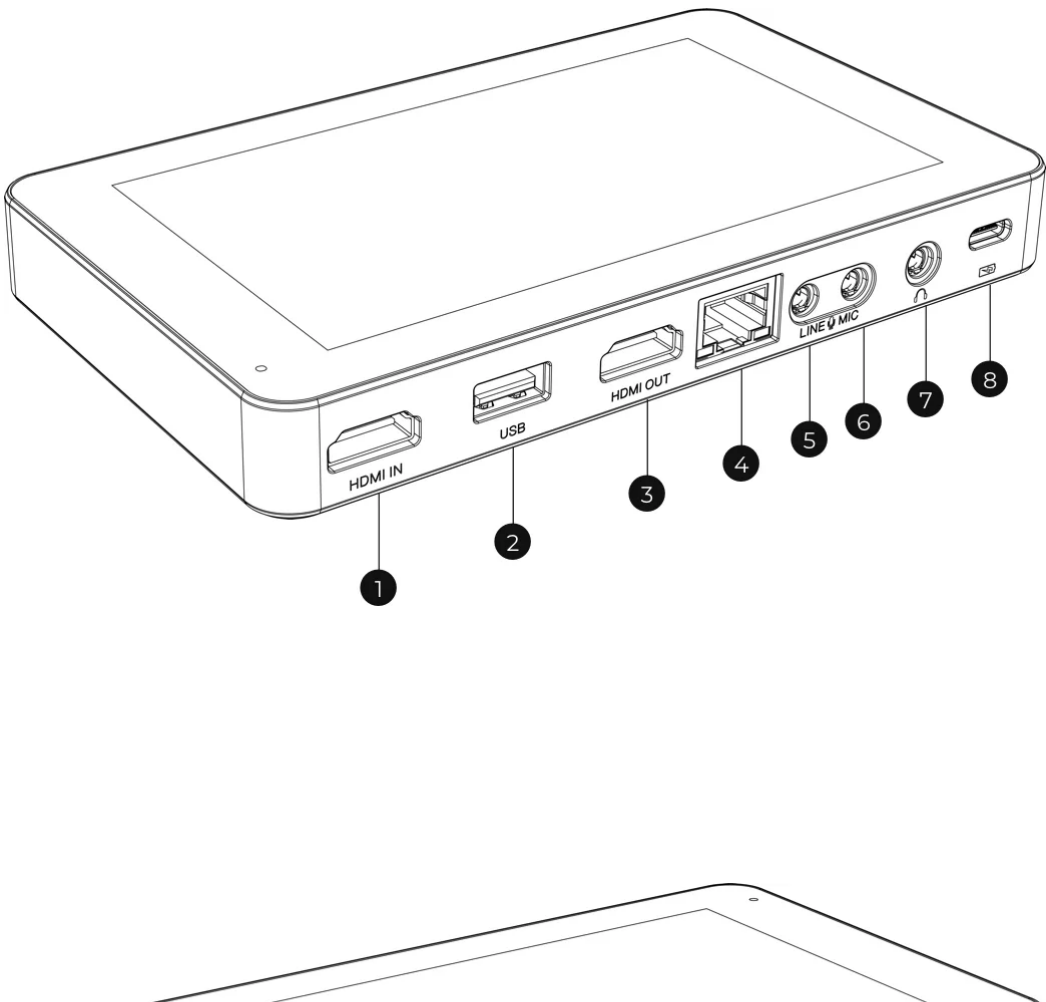

- 1 HDMI IN: Video input
- 2 USB IN: Video input
(Please note in some USB webcams, only video can be captured. Also, HDMI IN and USB IN sources cannot be used at the same time)
- 3 HDMI OUT: Video out to monitor or computer for Zoom/Skype meetings
- 4 ETHERNET PORT: Connect to Internet by Ethernet cable
- 5 LINE IN: Stereo, connect to electric guitar or synthesizer
- 6 MIC IN: Mono, connect to microphone for recording
- 7 AUDIO OUT: Connect with 3.5mm monitor headphones
- 8 USB

19/04/22, 16:23

Multi-Camera Livestreaming Made Easy.

8

USB-C/TYPE-C: Power connector

YoloBox Mini

✓

11

SD Card Slot: It's used for recording only

12

Power Button: Turn on and turn off

YoloBox Mini NOW AVAILABLE - Ultra-Portable, All-In-One Live Streaming Encoder & Monitor. CcX

Encoded Format

- Video Encoded Format : H.264
- Audio Encoded Format : AAC (44.1k)
- Video Recorded format : MP4
- Audio Input Format : 32kHz/44.1kHz/48kHz/16-bit/16kHz
- Video Input Format : 1080i/720p/1080p
- Live Broadcast Resolution : 480P/720P/1080P
- Frame Rate: Up to 60 fps

Video Storage

- Storage Card Type : SD Card
- Storage Card Capacity : Up to 1TB
- File System for SD Card: FAT32, exFAT, NTFS

Network Connection

- WiFi : 2.4G/5G
- 4G Network Countries & Frequency Band For
 - Users : [NA : Variant for North America (US/Canada/Mexico)]
 - B2/B4/B5/B7/B12/B13/B14/B17/B25/B26/B41/B66/B71
 - Notes : Mexico B4
- For Non-US/Canada/Mexico Users : (EM:Variant for EMEA/India/Korea/Taiwan/South Asia/Latin America/Australia/New Zealand) Users :
 - B1/B2/B3/B4/B5/B7/B8/B20/B28/B38/B39/B40/B41
 - Notes : Thailand B7
- Please note that the Yolobox complete machine certification corresponds to the mainstream frequencies and wavelengths of the local mainstream telecom operators.

SIM Card Size : Nano card

YoloBox Mini



Power

Power Interface : Type C, Quick Charge 3.0

Battery Capacity : 4700mAh

Input power rating: 5V-2.5A·9V-2A·12V-1.5A·

YoloBox Mini NOW AVAILABLE - Ultra-Portable, All-In-One Live Streaming Encoder & Monitor. CcX

Output power rating: 5V@1.5A

Transmission

Network Protocol : RTMP/RTMPS

Working Environment

Operating Temperature : 0°C-40°C

Operating Humidity: 15%-85%, No Condensation

Products

YoloBox

YoloBox Pro

YoloBox Mini

Solutions

Live Selling

Sports

Weddings

Church

Videographer

Education