

Blackmagic Ethernet Switch 360P



Blackmagic Ethernet Switch 360P is the first Ethernet switch designed specifically for the film and television industry. It is a high performance low latency Ethernet switch with 16 fast 10G Ethernet and 2 high speed 100G Ethernet ports, QSFP connection for high speed copper cables or longer optical fiber cables, rear Ethernet connections for better cable management and NMOS protocol for 2110 IP video workflows.

€2 745

Connessioni

Porte 10G Ethernet

16 x 10Gb/s RJ-45 connectors supporting 10/100/1000/10G BASE-T for SMPTE-2110 IP video in and out, configuration and firmware updates.

100G Ethernet Ports

2 x 100Gb/s QSFP connectors supporting 10/100/1000/10G/100G BASE-T for SMPTE-2110 IP video in and out, configuration and firmware updates.

Uscite di monitoraggio SDI


1

Uscite HDMI di monitoraggio

1

Interfaccia computer

USB-C

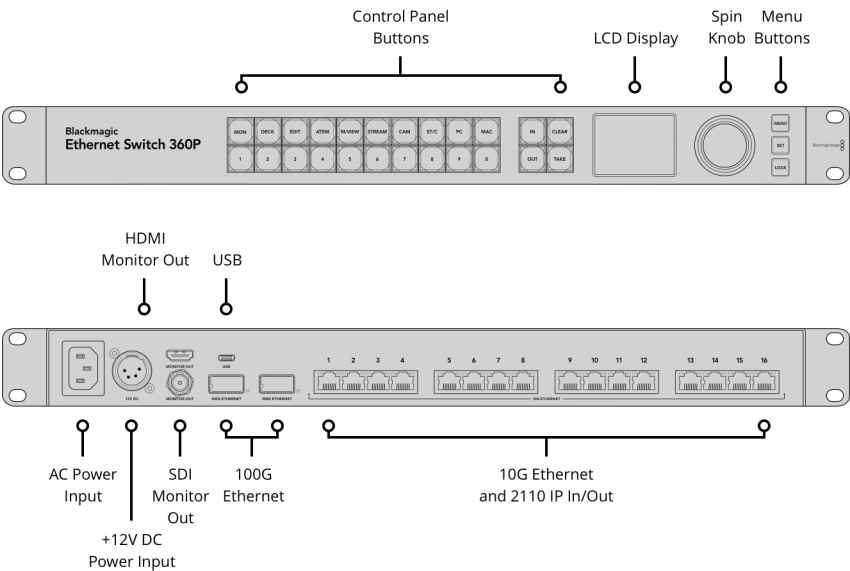

IP Video Compliance

Protocollo PTP

IEEE 1588-2008 (PTP v2)
ST 2059-1
ST 2059-2

NMOS IS-04 per il rilevamento e la registrazione

v1.3.2
Peer-to-peer via mDNS/DNS-SD

NMOS IS-05 gestione della connessione

v1.1.2

NMOS BCP-002-01

Natural Grouping

NMOS BCP-004-01

Receiver capabilities

Display

SDI Monitor Out Standards

1080p50, 1080p59.94, 1080p60

Standard uscita HDMI di monitoraggio

1080p50, 1080p59.94, 1080p60

Display uscita di monitoraggio

Device Name, network connections,
network activity.

Front Panel Display

Built in 2.2 inch LCD for video and
menu settings.

Controllo

Pannello di controllo integrato


24 buttons for local control of Blackmagic Ethernet Switch 360P with 3 buttons and search dial for video and menu settings menu control. 2.2 inch color display.

Software

Controllo software

Internal Software Upgrade
Via included updater application.

Sistemi operativi



Mac 13.0 Ventura,
Mac 14.0 Sonoma o successivo



Windows 10 a 64 bit
Windows 11

Requisiti di alimentazione

Alimentazione

Internal 100 - 240V AC 50/60Hz with IEC C14 mains input.

Ingressi di alimentazione

- 1 x IEC C14 mains input.
- 1 x 4-pin XLR +12V DC input.


Consumo energetico

TBA

Installazione

1 rack unit.

Specifiche fisiche

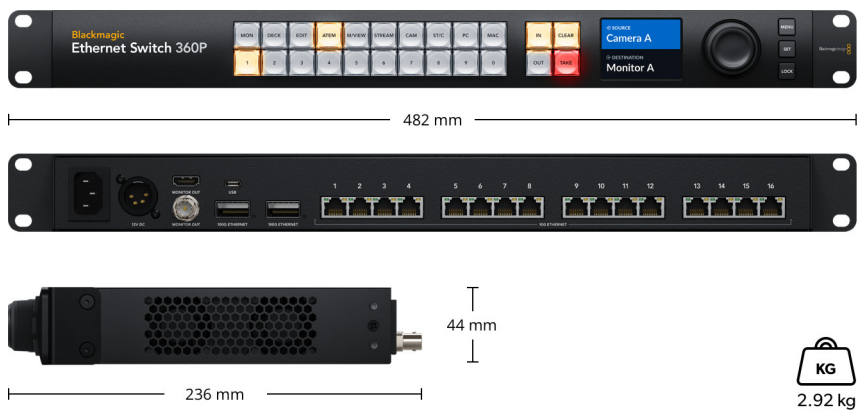

Specifiche ambientali

Temperatura operativa

5° to 40° C (41° to 104° F)

Temperatura di stoccaggio

-20° to 45° C (-4° to 113° F)

Umidità relativa

0% to 90% non-condensing

Il prodotto include

- Blackmagic Ethernet Switch 360P
- Welcome wallet with QR code for software download

Garanzia

12 Month Limited Manufacturer's Warranty.

Tutti gli elementi su questo sito web sono protetti dal copyright Blackmagic Design Pty. Ltd. 2024, tutti i diritti riservati. Tutti i marchi appartengono ai rispettivi proprietari. Il prezzo di vendita suggerito dal produttore esclude tasse di vendita e costi di spedizione. Questo sito web utilizza servizi di remarketing per mostrare annunci pubblicitari su siti web di terze parti dopo aver visitato il nostro sito. Puoi disattivare questa funzione in qualsiasi momento cambiando le impostazioni dei cookie. [Informativa sulla privacy](#).

Rivenditore autorizzato di Blackmagic Design