

# Blackmagic Media Player 10G



Blackmagic Media Player 10G is a powerful capture and playback solution packed with the latest broadcast technology! You get dual 12G-SDI outputs for fill and key playback, 12G-SDI capture and 10G Ethernet that lets customers use DaVinci Resolve 19 as a media player and replay solution for the live production and broadcast markets, all over a single Thunderbolt connection.

€939

## Connessioni

### Ingressi video SDI

1

### SDI Fill Outputs

1

### SDI Key Outputs

1

### Uscite SDI di loop

1

### SDI Extended Desktop Outputs

1

### Uscite di monitoraggio SDI

1

### Trasmissione SDI

270Mb, 1.5G, 3G, 6G, 12G.

### HDMI Extended Desktop Outputs

1

### Uscite HDMI di monitoraggio

1

### Uscite audio analogico

2 channels of professional balanced analog audio with 3-pin XLR connectors.  
1 x 6.35 mm headphone jack.

### Ingressi audio SDI

16 Channels embedded in SD/HD/2K/UHD/4K.

### Uscite audio SDI

16 Channels embedded in SD/HD/2K/UHD/4K.

### Ingressi audio HDMI

8 Channels embedded in SD/HD/UHD/4K.

### Uscite audio HDMI

8 Channels embedded in SD/HD/UHD/4K.

### Controllo dispositivo

1 x Sony™ compatible RS-422 deck control input port.

### USB


1 x USB-C 3.1 Gen 1 (up to 5 Gb/s).

### Interfaccia computer

2 x Thunderbolt™ 3 (Mac OS, Windows and Linux)  
1 x USB-C for keyboard, mouse and other USB devices

### Ethernet

1 x 10Gb/s RJ-45 connector supporting 1000/10G BASE-T.

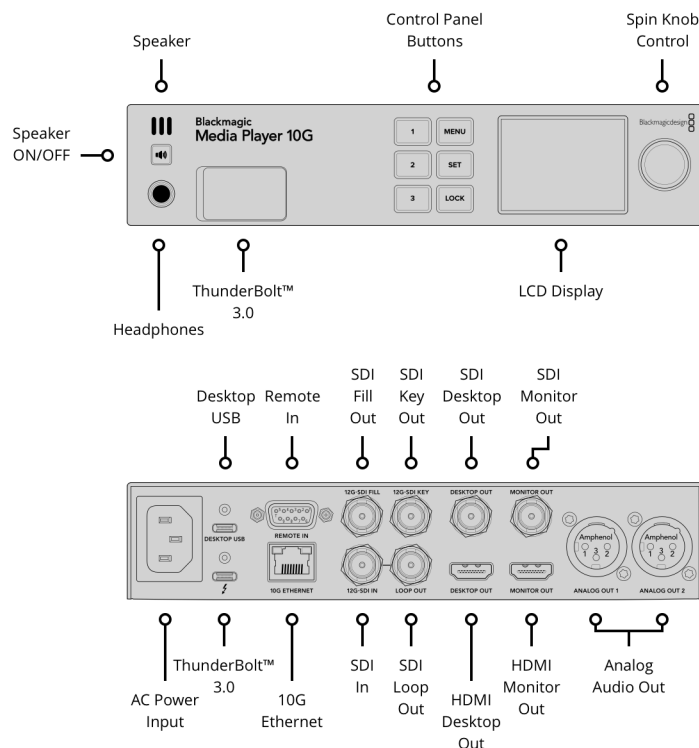

## Codec compatibili

### Codec video

AVC-Intra, AVCHD, Canon XF MPEG2, Digital SLR, DV-NTSC, DV-PAL, DVCPRO50, DVCPROHD, DPX, HDV, HEVC, XDCAM EX, XDCAM HD, XDCAM HD422, DNxHR & DNxHD, Apple ProRes 4444, Apple ProRes 422 HQ, Apple ProRes 422, Apple ProRes LT, Apple ProRes 422 Proxy, Uncompressed 8-bit 4:2:2, Uncompressed 10-bit 4:2:2, Uncompressed 10-bit 4:4:4.

## Software

### Software inclusi

Media Express, Disk Speed Test, LiveKey, Blackmagic Desktop Video Utility and Blackmagic driver on Mac OS and Windows. Media Express, Blackmagic Desktop Video Utility and Blackmagic driver on Linux.

### Aggiornamento del software interno

Firmware built into software driver. Software driver loads upgrades at system start or via updater software.



DaVinci Resolve



Fusion

## Standard video SDI

### Standard video SD

525i59.94 NTSC, 625i50 PAL

### Standard video HD

720p50, 720p59.94, 720p60  
1080i50, 1080i59.94, 1080i60  
1080p23.98, 1080p24, 1080p25,  
1080p29.97, 1080p30, 1080p50,  
1080p59.94, 1080p60

### Standard video 2K

2Kp23.98 DCI, 2Kp24 DCI, 2Kp25 DCI,  
2Kp29.97 DCI, 2Kp30 DCI, 2Kp50 DCI,  
2Kp59.94 DCI, 2Kp60 DCI  
2KPsF23.98 DCI, 2KPsF24 DCI,  
2KPsF25 DCI, 2KPsF29.97 DCI,  
2KPsF30 DCI

### Standard video Ultra HD

2160p23.98, 2160p24, 2160p25,  
2160p29.97, 2160p30, 2160p50,  
2160p59.94, 2160p60

### Standard video 4K

4Kp23.98 DCI, 4Kp24 DCI, 4Kp25 DCI,  
4Kp29.97 DCI, 4Kp30 DCI, 4Kp50 DCI,  
4Kp59.94 DCI, 4Kp60 DCI

### Conformità alla norma SDI

SMPTE 259M, SMPTE 292M, SMPTE  
292M, SMPTE 424M, SMPTE 425M  
livello A e B SMPTE 2081-1, SMPTE  
2081-10, SMPTE 2082-1, SMPTE  
2082-10, SMPTE 2084 and SMPTE  
ST2108-1.

### Metadati SDI compatibili

RP 188/SMPTE 12M-2 and  
closed captioning.

### Supporto multirate

SDI video connections are switchable  
between SD/HD/2K/UHD and 4K.

### Campionamento audio SDI

Television standard sample rate of 48  
kHz and 24-bit.

### Campionamento video SDI

4:2:2, 4:4:4

### Precisione colore SDI

8, 10, 12-bit RGB 4:4:4 in modes up to  
4Kp30 and 8, 10-bit YUV 4:2:2 in all  
modes.

### Spazio colore SDI

REC 601, REC 709 and REC 2020

### Compatibilità HDR

HDR static metadata packing, HLG  
and PQ transfer characteristics.

---

## Standard video HDMI

### Standard video SD

525i59.94 NTSC, 625i50 PAL

### Standard video HD

720p50, 720p59.94, 720p60  
1080i50, 1080i59.94, 1080i60  
1080p23.98, 1080p24, 1080p25,  
1080p29.97, 1080p30, 1080p50,  
1080p59.94, 1080p60

### Standard video Ultra HD

2160p23.98, 2160p24, 2160p25,  
2160p29.97, 2160p30, 2160p50,  
2160p59.94, 2160p60

### Standard video 4K

4Kp23.98 DCI, 4Kp24 DCI, 4Kp25 DCI,  
4Kp29.97 DCI, 4Kp30 DCI, 4Kp50 DCI,  
4Kp59.94 DCI, 4Kp60 DCI

### Campionamento audio HDMI

Television standard sample rate of 48  
kHz and 24-bit.

### Campionamento video HDMI

4:4:4, 4:2:2 and 4:2:0

### Precisione colore HDMI

8, 10 and 12-bit

### Spazio colore HDMI

REC 601, REC 709 and REC 2020

### Compatibilità HDR

HDR static metadata packing, HLG  
and PQ transfer characteristics.

---

#### HDR Configuration

HDMI 2.0b supports Deep Color and HDR. Automatically configures to connected display.

#### Supporto multirate

HDMI video connections are switchable between SD/HD/UHD and 4K.

---

#### Framebuffer hardware

v210 (10 bit YUV), 2vuy (8 bit YUV), ARGB, BGRA (8 bit RGB), r210 (10 bit RGB), Ay10 (10 bit YUVA), R12B, R12L (12 bit RGB).

---

#### Controllo

##### Pannello di controllo integrato

6 buttons, spin knob and 2.2 inch color display for menu and settings. Front speaker on/off button.

##### Controllo esterno

RS-422 deck control input for remote control of software. Also supports Advanced Media Protocol.

---

#### Installazione

Half rack unit width, 1 rack unit height.

---

#### Sistemi operativi



Mac 13.0 Ventura,  
Mac 14.0 Sonoma o successivo



Windows 10 a 64 bit  
Windows 11

---

#### Requisiti di alimentazione

##### Alimentazione

1 x Internal 100 - 240V AC 50/60Hz with IEC C14 socket.

##### Consumo energetico

TBA

---

## Specifiche fisiche



---

## Specifiche ambientali

### Temperatura operativa

5° to 40° C (41° to 104° F)

### Temperatura di stoccaggio

-20° to 45° C (-4° to 113° F)

### Umidità relativa

0% to 90% non-condensing

---

## Il prodotto include

Blackmagic Media Player 10G

Wallet di benvenuto con codice QR per scaricare il software

---

## Garanzia

3 Year Limited Manufacturer's Warranty.

Rivenditore autorizzato di Blackmagic Design