


Blackmagic Audio Monitor 12G G3



Blackmagic Audio Monitor 12G G3 is a powerful rack mount audio monitoring solution in a compact 1 rack unit size. This new model features 10G Ethernet SMPTE-2110 IP input to allow monitoring of IP broadcast systems without an external converter. Blackmagic Audio Monitor 12G G3 also includes a large audio meter with accurate ballistics, 12G-SDI input for SD, HD and Ultra HD support, balanced analog XLR, HiFi and AES/EBU inputs and HDMI video output for monitoring SDI and IP video sources.

€1 175

Connessioni

Ingressi video SDI

1

Uscite video SDI

1 loop out.

Trasmissione SDI

270Mb, 1.5G, 3G, 6G, 12G.

Uscite video HDMI 2.0

1

Compatibilità multirate

SDI and HDMI are switchable between standard definition, high definition and ultra high definition.

SDI di loop

1 x reclocked 10-bit SD-SDI, HD-SDI, 3G-SDI, 6G-SDI and 12G-SDI.

Ingressi audio analogico

2 x XLR. 2 x RCA HiFi.

Uscite audio analogico

1 x 6.5mm headphone socket.

Ingressi audio digitale

1 x XLR.

Speaker integrato

Stereo with 2-way crossover and independent stereo subwoofers.

Ingressi audio AES/EBU

2 channels balanced 110Ω AES/EBU via XLR.

Ingressi audio SDI

16 channels embedded in SD, HD and UltraHD 4K.

Uscite audio SDI

16 channels embedded audio loop out.

Uscite audio HDMI

8 Channels embedded in SD, HD and 4K.

Ethernet

1 x 10Gb/s RJ-45 connector supporting 10/100/1000/10G BASE-T for SMPTE-2110 IP video in, configuration and firmware updates.

Interfaccia computer


USB-C for configuration and firmware updates.

Metering

2 x 27 RGB segment LED VU, PPM or Loudness meters.

Modes

Push button interface allows for input selection, channel selection, independent left and right audio, mute and volume control with scroll wheel.

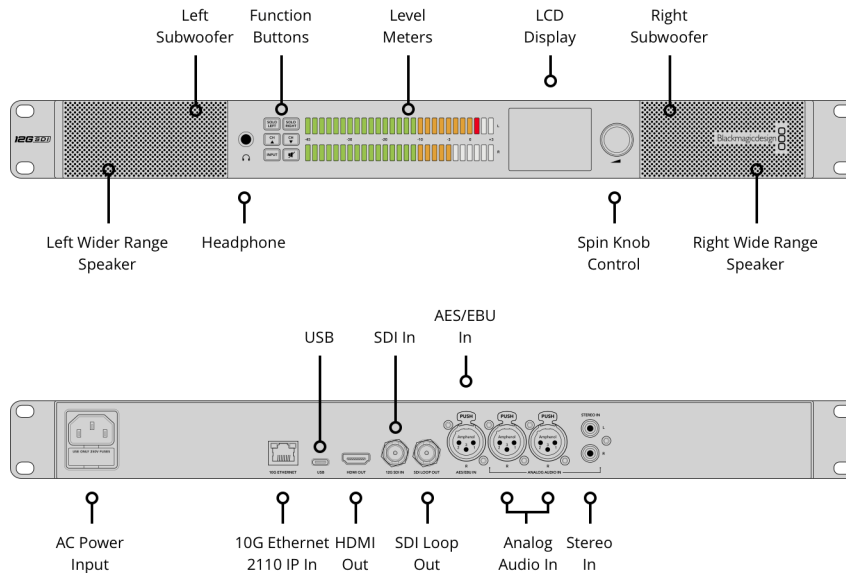

Standard

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60
1080i50, 1080i59.94, 1080i60
1080p23.98, 1080p24, 1080p25,
1080p29.97, 1080p30, 1080p47.95,
1080p48, 1080p50, 1080p59.94,
1080p60
1080PsF23.98, 1080PsF24,
1080PsF25, 1080PsF29.97, 1080PsF30

2K Video Standards

2K DCI 23.98p, 2K DCI 24p,
2K DCI 25p, 2K 23.98PsF, 2K 24PsF,
2K 25PsF

Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,
2160p29.97, 2160p30, 2160p50,
2160p59.94, 2160p60

4K Video Standards

4KDCIp23.98, 4KDCIp24, 4KDCIp25,
4KDCIp29.97, 4KDCIp30, 4KDCIp50,
4KDCIp59.94, 4KDCIp60

SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE
296M, SMPTE 424M, SMPTE 425M
livello A e B SMPTE 2081-1, SMPTE
2081-10, SMPTE 2082-1, SMPTE
2082-10, SMPTE 2110-20, SMPTE
2110-21, SMPTE 2110-30, SMPTE
2110-40, SMPTE 2084, SMPTE 2108-1.

SDI Auto Switching

Automatically selects between SD,
HD, 3G-SDI level A and B, 6G-SDI
and 12G-SDI.

Audio Sampling

96 KHz and 24 bit.

Video Sampling

4:2:2 and 4:4:4

Scale di misurazione

54 RGB segment LEDs allowing
selection of metering with VU, PPM
EBU, PPM BBC or Loudness. Includes
replaceable level scale.

IP Video Compliance

SMPTE 2110-20 (Uncompressed Video)

IGMP v2

SMPTE 2110-21 (Traffic Shaping)

Sender: Narrow

Receiver: Narrow, Wide Synchronous, Asynchronous

SMPTE 2110-30 (PCM)

Audio Conformance level: Level C

SMPTE 2110-40 (Ancillary Data)

Full access to entire SMPTE ancillary data stream. Includes RP 188/SMPTE 12M-2, closed captioning and HDR static metadata.

Protocollo PTP

IEEE 1588-2008 (PTP v2)

ST 2059-1

ST 2059-2

NMOS IS-04 Discovery and Registration

v1.3.2

Peer-to-peer via mDNS/DNS-SD

NMOS IS-05

Connection Management

v1.1.2

NMOS BCP-002-01

Natural Grouping

NMOS BCP-004-01

Receiver capabilities

Codec

Blackmagic IP10 codec used when converting 12G-SDI rates to 10G 2110 IP video.

Controllo

Built-in Control Panel

2.2 inch display for viewing video input, video standard and selected audio input.

Software

Internal Software Upgrade

Via USB connection and Ethernet

Sistemi operativi



Mac 10.13 High Sierra
Mac 10.14 Mojave o successivo



Windows 8.1 e 10.

Display

Display Element

2.2 inch diagonal color LCD.

Display Resolution

320 x 240.

Input Display

SDI video, format, audio type
and audio channels.

Requisiti di alimentazione

Power Supply

1 x Internal 100 - 240V AC.

Power Usage

55 Watts

Installazione

1 rack unit.

Specifiche fisiche



Specifiche ambientali

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 45° C (-4° to 113° F)

Relative Humidity

0% to 90% non-condensing

Il prodotto include

Blackmagic Audio Monitor 12G G3
PPM and Loudness Scale Stickers
Wallet di benvenuto con codice QR per scaricare il software

Garanzia

12 Month Limited Manufacturer's Warranty.

Tutti gli elementi su questo sito web sono protetti dal copyright Blackmagic Design Pty. Ltd. 2024, tutti i diritti riservati. Tutti i marchi appartengono ai rispettivi proprietari. Il prezzo di vendita suggerito dal produttore esclude tasse di vendita e costi di spedizione. Questo sito web utilizza servizi di remarketing per mostrare annunci pubblicitari su siti web di terze parti dopo aver visitato il nostro sito. Puoi disattivare questa funzione in qualsiasi momento cambiando le impostazioni dei cookie. [Informativa sulla privacy](#).

Rivenditore autorizzato di Blackmagic Design